



MIX AND MATCH FOR OPTIMAL PHOTOVOLTAIC INSTALLATIONS


FLEXIBLE, RIGID, PREWIRED AND EMPTY
PHOTOVOLTAIC CONNECTION SYSTEMS

PIPELIFE 
always part of your life

OPTIMIZE YOUR PHOTOVOLTAIC INSTALLATION

Save on time, material and effort when creating professional photovoltaic connections for each of your clients and projects.

To suit your individual needs and preferences, we offer a wide product assortment. Whether you opt for flexible prewired DC or empty conduits, rigid UV stable connections, or a combination of these, count on top-quality materials for your top-quality commercial as well as residential PV installations. Benefit from a wide range of accessories like bends, couplers, fixtures and entry points, to facilitate installation and achieve the best possible results in regard to reliability as well as safety.

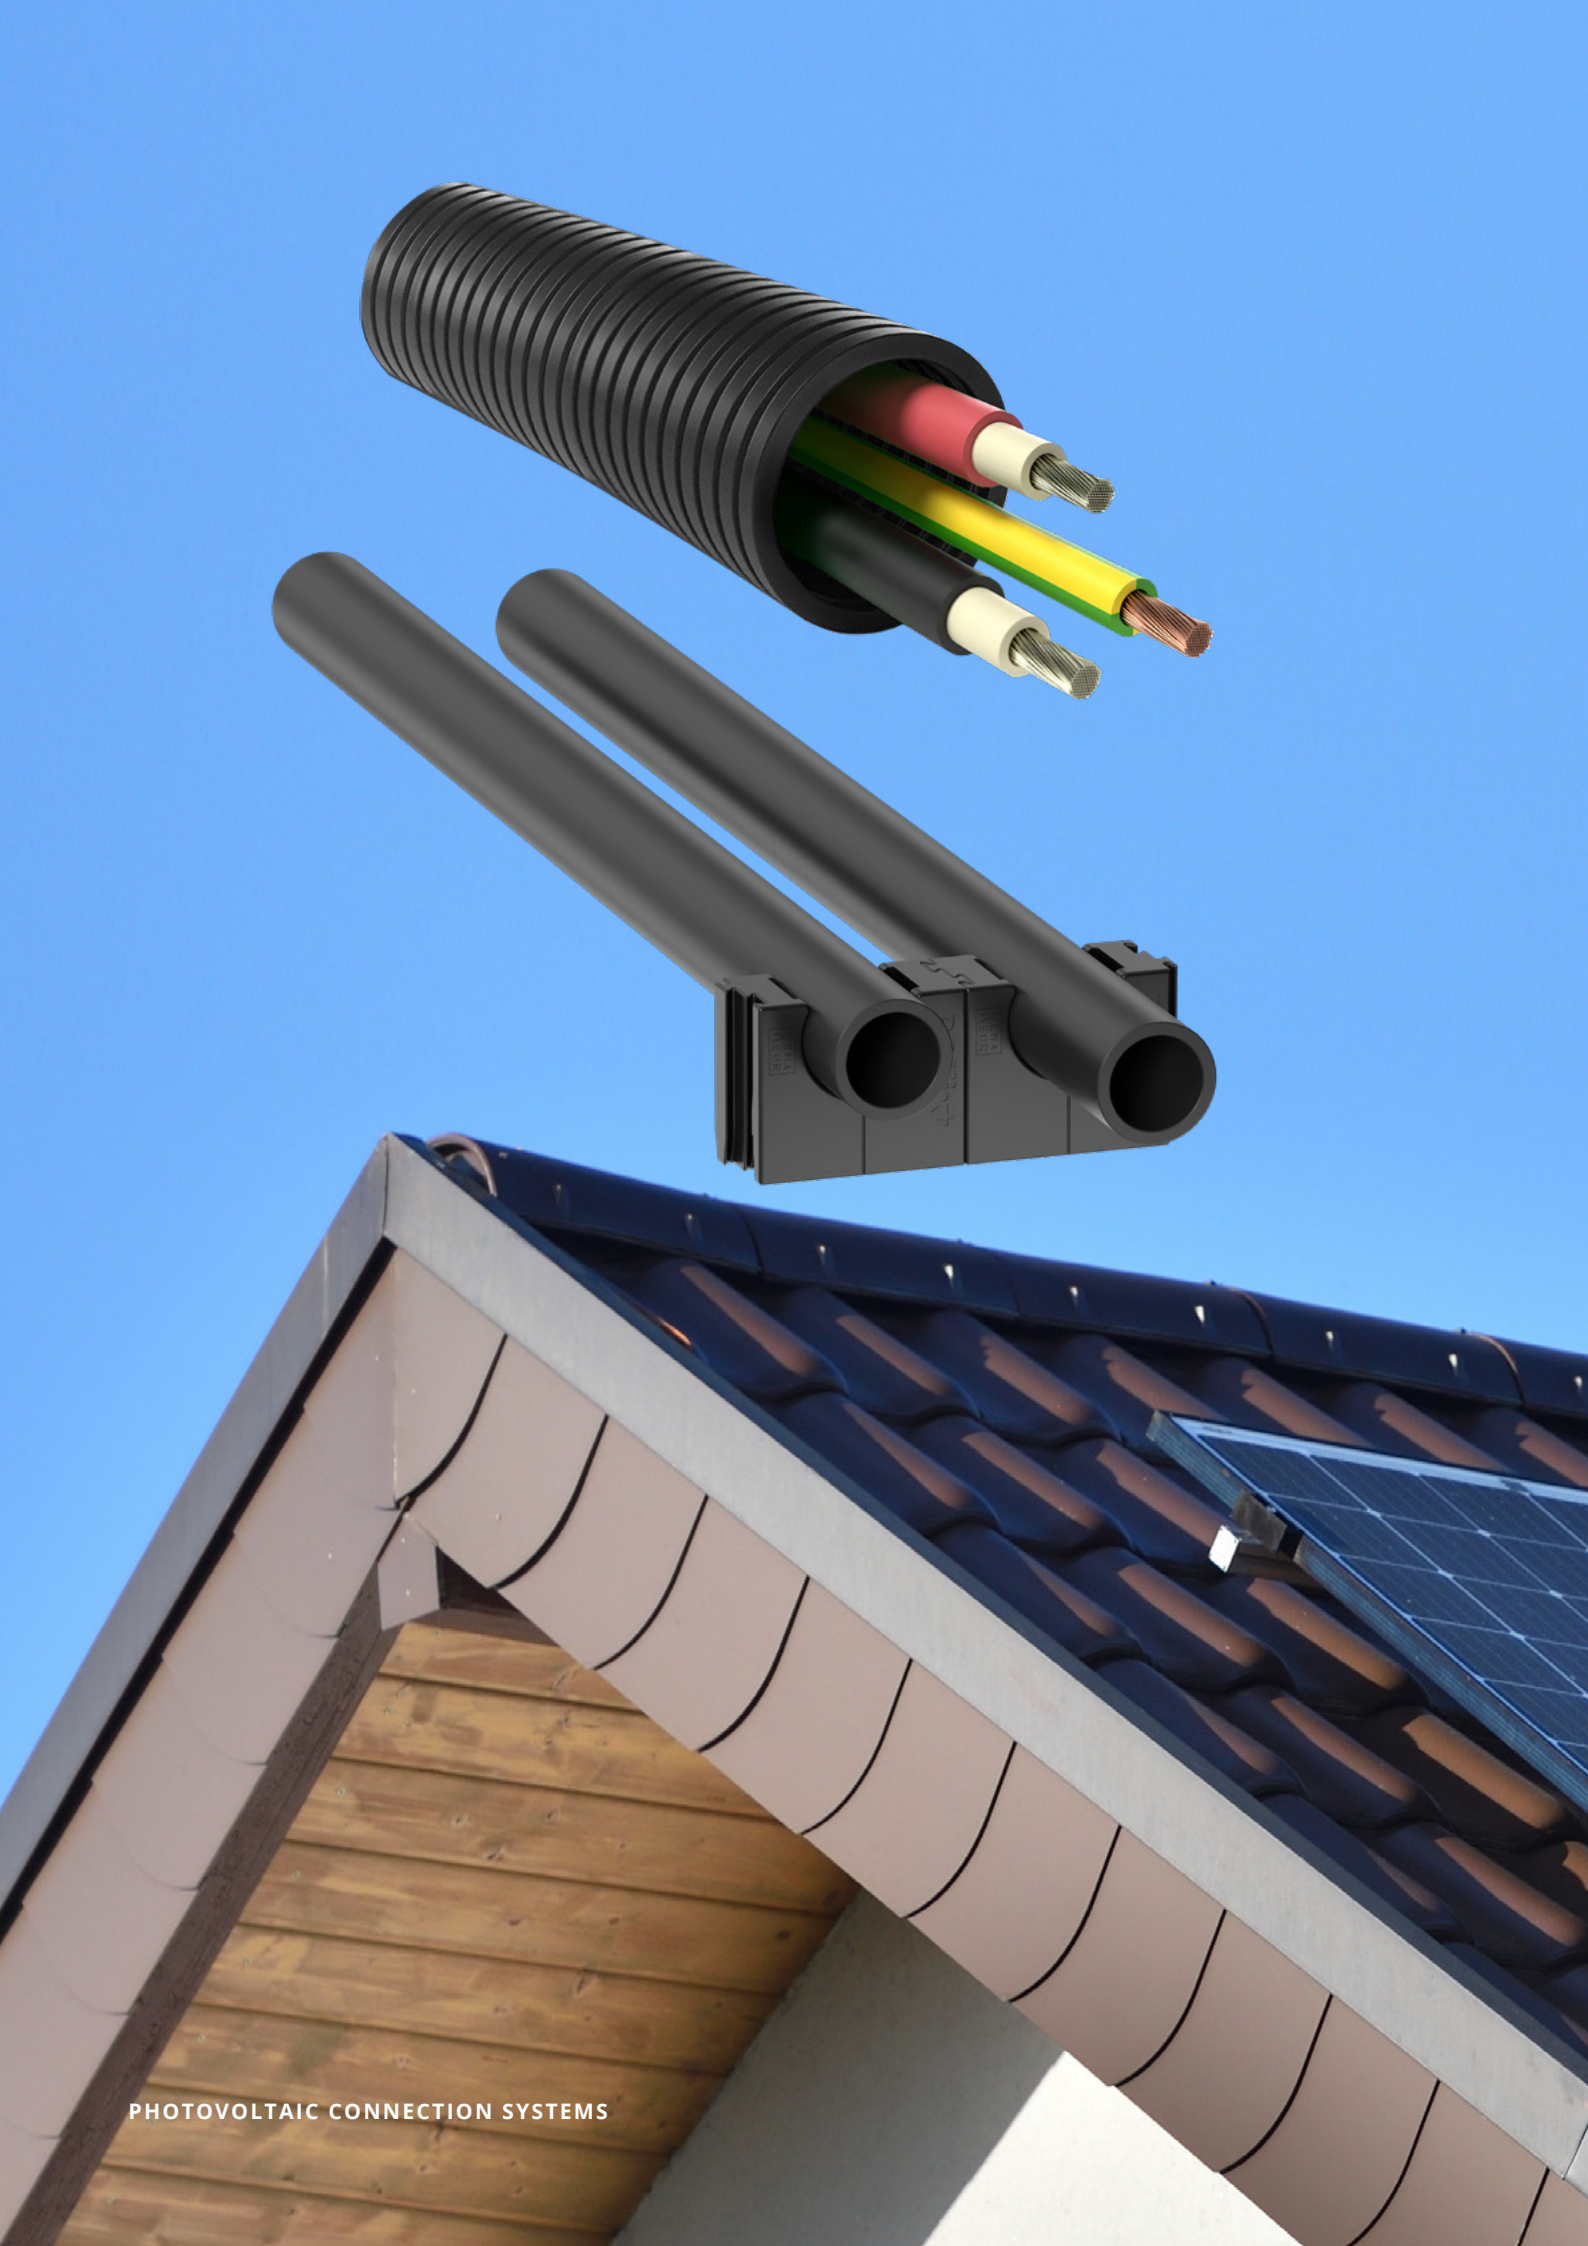

PHOTOVOLTAIC CONNECTION SYSTEMS



APPLICATION AREAS

COMMERCIAL AND RESIDENTIAL BUILDINGS

FLAT ROOF AND TILTED ROOF

NEW BUILDING AND RETROFITTED

FLEXIBLE PREWIRED DC CONDUITS

If you want to cut installation time and save on hassle, then our corrugated flexible prewired DC conduits are the right choice.

- + **No manual cable feeding**
- + **Less material to transport**
- + **Less waste to deal with**
- + **Various rewiring options**


RIGID UV STABLE CONDUITS

A wide range of fittings and accessories that are equally UV resistant as the conduits themselves, ensure optimized routing of your connections – in a visual as well as practical sense.

- + **Optimal routing**
- + **Easy, low-friction cable feeding**
- + **Top UV protection**
- + **Long service life**

CONDUITS

PREWIRED FLEXIBLE CONDUITS



| | Ø | Packaging | UV stable | Hologen free | Impact resistant |
|---|-------|------------|-----------|--------------|------------------|
| Cca 2xSOLAR 4 mm ² | 25 mm | coil 100 m | x | x | x |
| Cca 2xSOLAR 4 mm ² + 1G4 mm ² | 25 mm | coil 100 m | x | x | x |
| Cca 2xSOLAR 4 mm ² + 1G6 mm ² | 25 mm | coil 100 m | x | x | x |
| Cca 4xSOLAR 4 mm ² + 1G4 mm ² | 32 mm | coil 100 m | x | x | x |
| Cca 2xSOLAR 4 mm ² | 25 mm | reel 200 m | x | x | x |
| Cca 2xSOLAR 4 mm ² + 1G4 mm ² | 25 mm | reel 200 m | x | x | x |
| Cca 2xSOLAR 4 mm ² + 1G6 mm ² | 25 mm | reel 200 m | x | x | x |
| Cca 2xSOLAR 6 mm ² | 25 mm | coil 100 m | x | x | x |
| Cca 2xSOLAR 6 mm ² + 1G6 mm ² | 25 mm | coil 100 m | x | x | x |
| Cca 4xSOLAR 6 mm ² + 1G6 mm ² | 32 mm | coil 100 m | x | x | x |

EMPTY FLEXIBLE CONDUITS WITH PULL WIRE



| Ø | Packaging | UV stable | Low friction | Halogen free | Impact resistant |
|-------|------------|-----------|--------------|--------------|------------------|
| 16 mm | coil 100 m | x | x | x | x |
| 20 mm | coil 100 m | x | x | x | x |
| 25 mm | coil 100 m | x | x | x | x |
| 32 mm | coil 100 m | x | | | |

RIGID CONDUITS



| Ø | Length | UV stable | Impact resistant | Low friction |
|-------|--------|-----------|------------------|--------------|
| 16 mm | 3 m | x | x | x |
| 20 mm | 3 m | x | x | x |
| 25 mm | 3 m | x | x | |
| 32 mm | 3 m | x | x | |
| 40 mm | 3 m | x | x | |
| 50 mm | 3 m | x | x | |

ACCESSORIES

COUPLERS



| Ø | Packaging | UV stable | Impact resistant |
|-------|-----------|-----------|------------------|
| 16 mm | 500 pcs | x | x |
| 20 mm | 500 pcs | x | x |
| 25 mm | 100 pcs | x | x |
| 32 mm | 75 pcs | x | x |
| 40 mm | 50 pcs | x | x |
| 50 mm | 25 pcs | x | x |

BENDS



| Ø | Packaging | UV stable | Impact resistant |
|-------|-----------|-----------|------------------|
| 16 mm | 100 pcs | x | x |
| 20 mm | 100 pcs | x | x |
| 25 mm | 50 pcs | x | x |
| 32 mm | 1 pc | x | x |

END CAPS



| Ø | Packaging | UV stable | Impact resistant |
|-------|-----------|-----------|------------------|
| 16 mm | 1000 pcs | x | x |
| 20 mm | 1000 pcs | x | x |
| 25 mm | 500 pcs | x | x |

CLIPS



| Ø | Packaging (inner / outer carton) | UV stable | Impact resistant |
|-------|----------------------------------|-----------|------------------|
| 16 mm | 150 / 1200 pcs | x | x |
| 20 mm | 100 / 800 pcs | x | x |
| 25 mm | 75 / 600 pcs | x | x |
| 32 mm | 40 / 320 pcs | x | x |
| 40 mm | 25 / 200 pcs | x | x |
| 50 mm | 10 / 80 pcs | x | x |



The contents and information contained in this brochure are intended for general marketing purposes only and shall not be relied upon by any person as complete or accurate. In particular, this brochure cannot replace proper expert advice on the characteristics of the products, their usage, suitability for any intended purpose, or the proper processing method. All contributions and illustrations in this brochure are subject to copyright. Unless explicitly otherwise stated, the repetition of content is not permitted. The use of photocopies from this brochure is for private and non-commercial use only. Any duplication or distribution for professional purposes is strictly forbidden. Non-Liability: PIPELIFE has established this brochure to the best of its knowledge. PIPELIFE cannot accept any liability suffered or incurred by any person resulting from or in connection with any reliance on the content of or the information contained in this brochure. This limitation applies to all loss or damage of any kind, including but not limited to direct or indirect damages, consequential or punitive damages, frustrated expenses, lost profit or loss of business.